

# High Pressure Filter 1/2" – 400 bar – AISI



Hytar high pressure filter can be used in protecting nozzles and other sensitive components in pressure lines up to 400 bar. The filter body is constructed entirely of stainless steels. Filter suits for all kinds of high pressure applications.

- High working pressure stainless steel contrustion
- Direct pipe-mounting

 Standard delivery with 40 µm filter element, other sizes upon request








## High Pressure Filter 1/2" – 400 bar – AISI


### **The Clean Power**

#### **Technical Specifications**

Max pressure	400 bar (5800 psi)
Nominal size	1/2"
Max fluid temperature	+150°C (300°F)
Fluid	Water, salt water and low viscosity fluids
Fluid connections	2 x G1/2" (ISO228/1)
Mounting	Mounted in-line
Weight	3,8 kg (4,6 lbs)

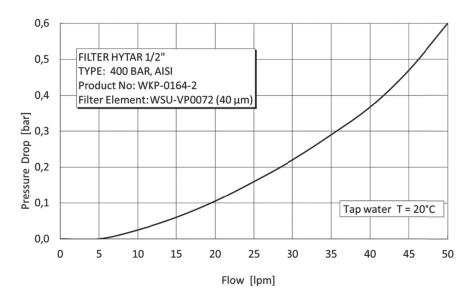

#### **Principal Dimensions**

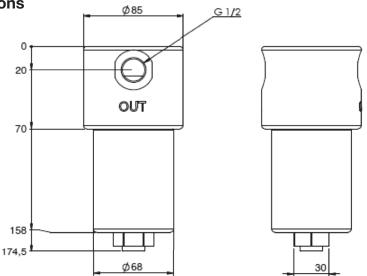



#### Hytar Oy Water Hydraulics

Turjankatu 1 B, FI-33100 TAMPERE, Finland Tel: +358 10 613 7150 • info@hytar.fi • www.hytar.fi

